


PRODUCT DATA SHEET

MULTIPLY VELLUM TTR – PERN ADHESIVE – G60Y + G60W

Issued Date : 02.01.2019

Structure

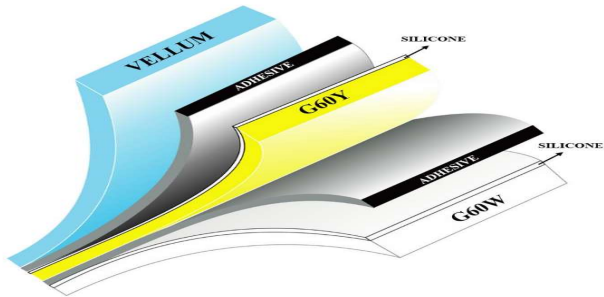

Facestock **Vellum 73 TTR** **1100**

White uncoated woodfree paper for thermal transfer printing with a wide range of wax and wax/resin ribbons (prior testing recommended). Suitable for flexo, offset, laser, copier and inkjet.

Typical values

Grammage	ISO 536	gsm	73
Caliper	ISO 534	µm	73

Adhesive **HOTMELT** **P**

Pressure sensitive hot melt adhesive for labels, with high tack and peel properties, good wetting to substrates and oil resistance , as well as good die-cuttability

Food contact

Compliance with FDA 21 CFR 175.105

Typical values

Loop Tack	FTM 9	High
Final adhesion	FTM 1	High
Application temperature		0°C - 40°C
Service temperature range		- 20°C/+50°C

Liner **G60YS/G60WS**

As first layer siliconised supercalendered yellow, second liner white glassine paper allowing seamless label detection for consistent label dispensing.

Typical values

Grammage	ISO 536	gsm	60
Caliper	ISO 534	µm	53

Shelf life

1 year when stored at 22 °C and 50% rH

PANOVAL disclaims all conditions and warranties, whether express or implied, including the implied warranties of fitness for a particular purpose or merchantability. PANOVAL shall not be responsible for consequential, indirect or incidental damages (including loss of profits) of any kind. It is the customer's responsibility and obligation to carefully inspect and test any incoming goods. Performance of the product described herein should be verified by testing and carried out only by qualified experts . It is the sole responsibility of the customer to carry out and arrange for any such testing.

All information is subject to change without notice

PANOVAL Asia , Lot E9 – 2B , Street 1 , Hiep Phuoc Industrial Park, Nha Be Province , Ho Chi Minh City Vietnam info@panoval.com www.panoval.com